
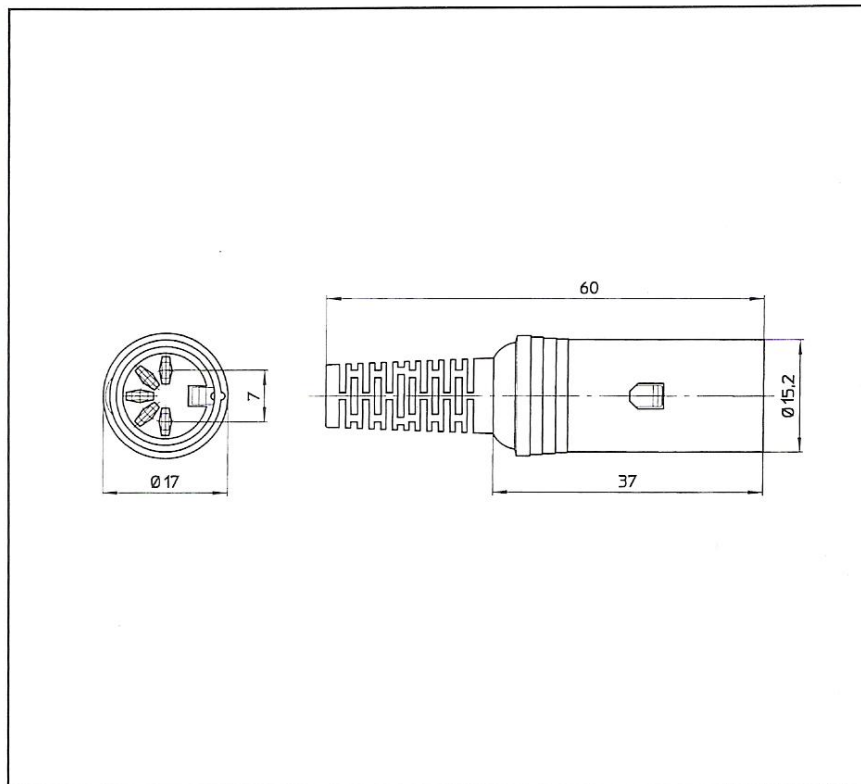


PRESE DIN		DIN SOCKETS		PRISES DIN		DIN BUCHSEN
Tipo	MG/PR...S	Volanti		Schermate		
Type		In-line		Screened		
Type		En-ligne		Blindées		
Typ		Drahtanschluß		Abgeschirmte		



Corpo isolante <i>Insulating body</i> Corps isolant <i>Isolierkörper</i>	Cappuccio <i>Cap</i> Capuchon <i>Deckel</i>	Nero/Grigio <i>Black/Grey</i> Noir/Gris <i>Schwarz/Grau</i>	Contatti <i>Contacts</i> Contacts <i>Kontakte</i>
PA 6	LD-PE UL 94 HB		CuZn 37 + Ni + Sn
Corrente per contatto <i>Current for contact</i> Intensité par contact <i>Belastung für kontakt</i>	Tensione <i>Voltage</i> Tension <i>Spannung</i>	Temperatura di lavoro <i>Working temperature</i> Température d'utilisation <i>Temperaturbereich</i>	Resistenza di contatto <i>Contact resistance</i> Résistance de contact <i>Übergangswiderstand</i>
4 A	34 V (DC) 24 V (AC)	min. -30°C max. +80°C	≤ 10 mΩ

SCHEMA PER ORDINAZIONE	MG/PR		 S						
ORDER SCHEME									
TABLEAU DE COMMANDE									
BESTELLSCHHEMA									
	3	4	5	5K	5P	6	7	8	8-1
									
	DIN 41524		DIN 41524	DIN 45327	DIN 45322	DIN 45322	DIN 45329	DIN 45326	DIN 41524