

SPINE DIN

Tipo
Type
Type
Typ

MG/SP...


DIN PLUGS

Volanti
In-line
En-ligne
Drahtanschluß

FICHES DIN

Schermate
Screened
Blindées
Abgeschirmte

DIN STECKER

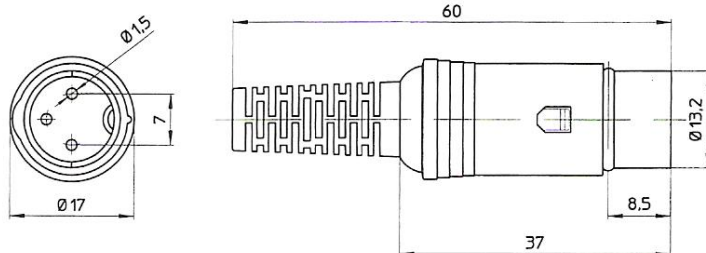

Corpo isolante
Insulating body
Corps isolant
Isolierkörper

PA 6

Cappuccio
Cap
Capuchon
Deckel

LD-PE UL 94 HB

Nero/Grigio
Black/Grey
Noir/Gris
Schwarz/Grau

Contatti
Contacts
Contacts
Kontakte

CuZn 37 + Ni + Sn

Corrente per contatto
Current for contact
Intensité par contact
Belastung für kontakt

4 A

Tensione
Voltage
Tension
Spannung

**34 V (DC)
24 V (AC)**

Temperatura di lavoro
Working temperature
Température d'utilisation
Temperaturbereich

**min. -30°C
max. +80°C**

Resistenza di contatto
Contact resistance
Résistance de contact
Übergangswiderstand

≤ 10mΩ

SCHEMA PER ORDINAZIONE

MG/SP

.....

ORDER SCHEME

TABLEAU DE COMMANDE

BESTELLSCHHEMA

