
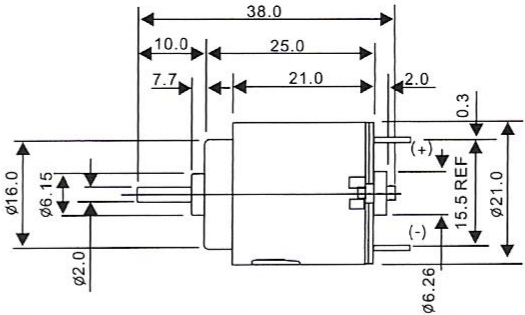






NO. 19- Application :Remote Contol Car, General Products

|                                                                                  |                                                                                                                                                                                                                                                                                                                                    |           |         |         |                       |       |        |      |       |        |       |         |
|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|---------|-----------------------|-------|--------|------|-------|--------|-------|---------|
|  | <div><div><div>DIRECTION OF ROTATION</div></div><div></div><div></div></div> |           |         |         |                       |       |        |      |       |        |       |         |
|                                                                                  | VOLTAGE                                                                                                                                                                                                                                                                                                                            |           | NO LOAD |         | AT MAXIMUM EFFICIENCY |       |        |      |       | STALL  |       |         |
| Model                                                                            | OPERATING RANGE                                                                                                                                                                                                                                                                                                                    | NOMINAL V | SPEED   | CURRENT | CURRENT               | SPEED | TORQUE |      | OUPUT | TORQUE |       | CURRENT |
|                                                                                  |                                                                                                                                                                                                                                                                                                                                    |           | r/min   | A       | A                     | r/min | mN-M   | g.cm |       | W      | mN-cm | g.cm    |
| YTR-140                                                                          | 1.5 - 3.0                                                                                                                                                                                                                                                                                                                          | 1.5       | 8100    | 0.21    | 0.66                  | 6150  | 0.66   | 6.7  | 0.42  | 2.74   | 28    | 2.10    |
| YTR-140                                                                          | 1.5 - 3.0                                                                                                                                                                                                                                                                                                                          | 3         | 14200   | 0.25    | 0.98                  | 11320 | 1.04   | 10.6 | 1.42  | 5.15   | 53    | 3.87    |
| YTR-140                                                                          | 1.5 - 3.0                                                                                                                                                                                                                                                                                                                          | 1.5       | 5700    | 0.13    | 0.37                  | 4230  | 0.48   | 4.9  | 0.21  | 1.86   | 19    | 1.0     |

No. 20 Application: Remote Contol Car, General Products

|                                                                                   |                                                        |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
|  | <div><div><div>DIRECTION OF ROTATION</div></div></div> |  |  |  |  |  |  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|--------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|

No. 21 Remote Contol Car, General Product
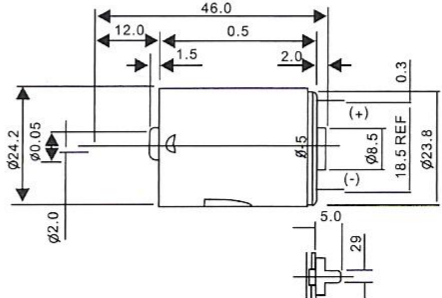
|  | <div><div><p><u>DIRECTION OF ROTATION</u></p></div><div></div><div></div><div></div></div> |           |         |         |                       |       |        |      |       |        |      |         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|---------|---------|-----------------------|-------|--------|------|-------|--------|------|---------|
| Model                                                                              | VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                   |           | NO LOAD |         | AT MAXIMUM EFFICIENCY |       |        |      |       | STALL  |      |         |
|                                                                                    | OPERATING RANGE                                                                                                                                                                                                                                                                                                                                                                                                                           | NOMINAL V | SPEED   | CURRENT | CURRENT               | SPEED | TORQUE |      | OUPUT | TORQUE |      | CURRENT |
|                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                           |           | r/min   | A       | A                     | r/min | mN-M   | g.cm | W     | mN-cm  | g.cm | A       |
| YTR-280                                                                            | 1.5 _ 3.0                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1.5       | 4600    | 0.12    | 0.53                  | 3740  | 1.13   | 11.5 | 0.44  | 6.08   | 62   | 2.30    |
| YTR-280                                                                            | 1.5 - 3.0                                                                                                                                                                                                                                                                                                                                                                                                                                 | 3         | 9200    | 0.16    | 0.87                  | 7770  | 1.98   | 20.2 | 1.61  | 12.7   | 130  | 4.70    |
| YTR-280                                                                            | 3 -6                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3         | 5000    | 0.070   | 0.33                  | 4120  | 1.30   | 13.3 | 0.56  | 7.36   | 75   | 1.52    |