

PORTAFUSIBILI

FUSE-HOLDERS

PORTE-FUSIBLES

SICHERUNGSSCHALTER


Tipo
Type
Type
Typ

PTF/15
PTF/15S
PTF/15B


Per fusibili
For fuses
Pour fusibles
Für Sicherungen

5 x 20


Per C.S.
For P.C.B.
Pour C.I.
Für Leiterplatte

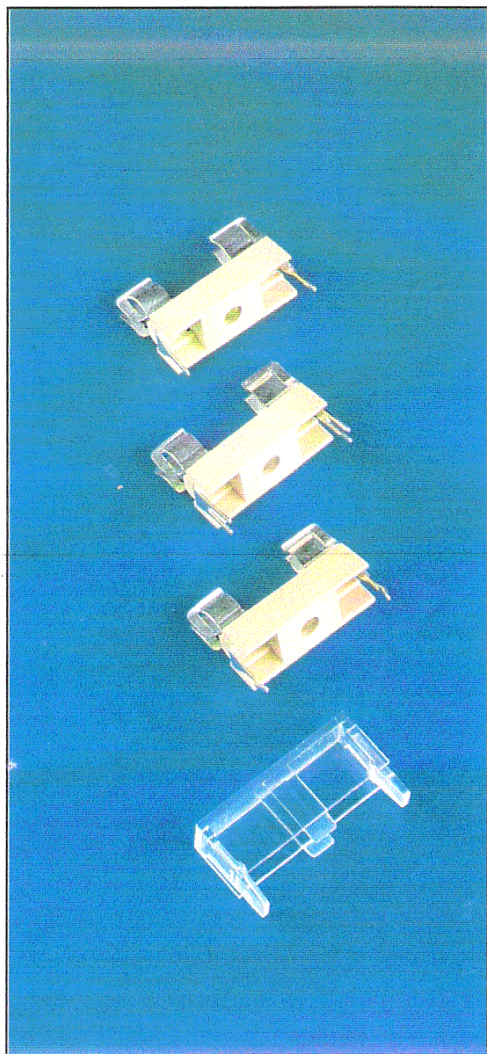



PTF/15

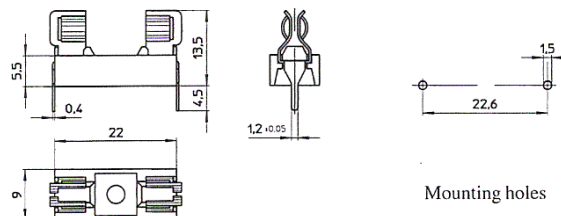

PTF/15S

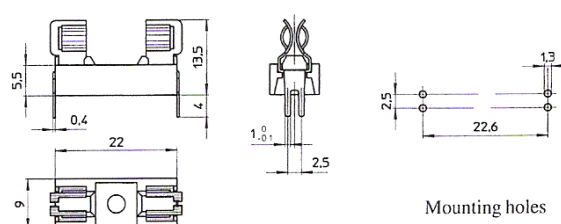

PTF/15B

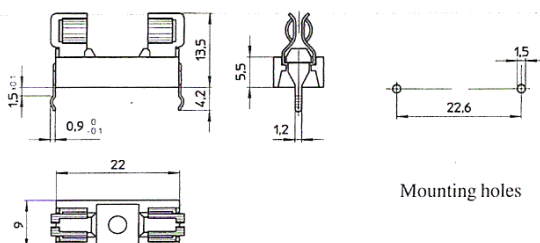BS/140
BS/140A

Corpo isolante
Insulating body
Corps isolant
Isolierkörper
PPOM UL 94 V1

Beige
Beige
Beige
Beige

Coperchio
Cover
Couverture
Deckel
BS 140 - SAN
BS 140A - PC UL 94 V0

Contatti
Contacts
Contacts
Kontakte
CuZn 37 + Ni + Sn

Foro di montaggio
P.C.B. mounting hole
Perçage C.I.
Leiterplattenbohrung
Ø 1,3 ÷ 1,5 mm

Categoria
Class
Catégorie
Baureihe
PC1

Corrente nominale
Nominal current
Courant nominal
Strombelastbarkeit
6,3 A

Tensione
Voltage
Tension
Betriebsspannung
250 V

Potenza dissipabile
Operating power
Puissance dissipable
Ausgangsleistung
1,6 W

Resistenza di contatto
Contact resistance
Résistance de contact
Übergangswiderstand
< 5 mΩ

Resistenza di isolamento
Insulation resistance
Résistance d'isolement
Isolationswiderstand
> 10² MΩ

Rigidità dielettrica
Dielectric strength
Rigidité diélectrique
Durchschlagsfestigkeit
> 3000 Vac/60"

