

PORTAFUSIBILI

FUSE-HOLDERS

PORTE-FUSIBLES

SICHERUNGSSCHALTER


Tipo
Type
Type
Typ

PTF/77
PTF/78


Per fusibili
For fuses
Pour fusibles
Für Sicherungen

5 x 20

Per C.S.
For P.C.B.
Pour C.I.
Für Leiterplatte

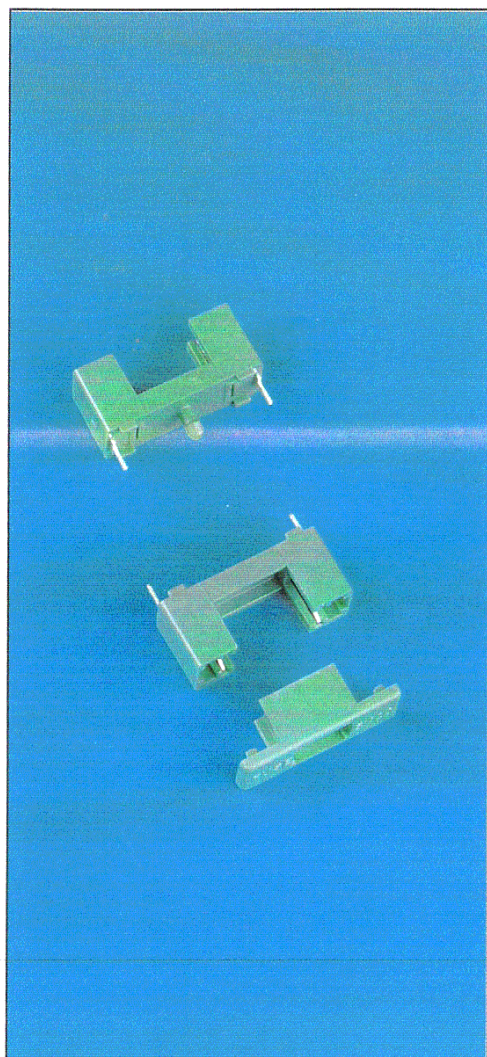


PTF/77

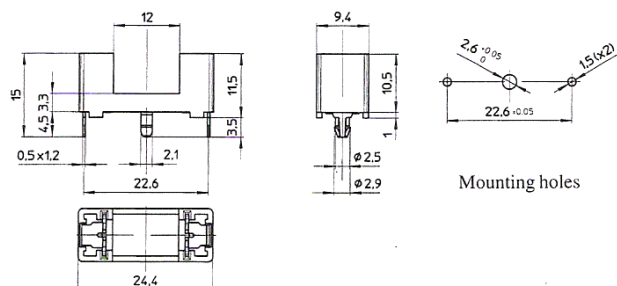


Mounting holes

PTF/78

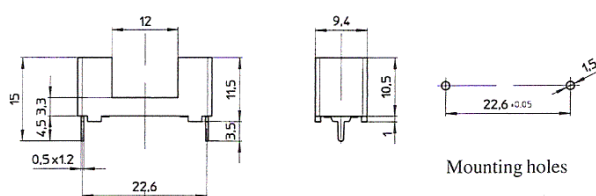

Mounting holes

BS 232



Corpo isolante
Insulating body
Corps isolant
Isolierkörper

PA 68 UL 94 V0

Coperchio
Cover
Couverture
Deckel

PA 68 UL 94 V0

Verde
Green
Vert
Grün

Contatti
Contacts
Contacts
Kontakte

CuZn 37 + Ni + Sn

Foro di montaggio
P.C.B. mounting hole
Perçage C.I.
Leiterplattenbohrung

Ø 1,5 mm

Categoria
Class
Catégorie
Baureihe

PC1

Corrente nominale
Nominal current
Courant nominal
Strombelastbarkeit

6,3 A

Tensione
Voltage
Tension
Betriebsspannung

250 V

Potenza dissipabile
Operating power
Puissance dissipable
Ausgangsleistung max

1,6 W

Resistenza di contatto
Contact resistance
Résistance de contact
Übergangswiderstand

< 5 mΩ

Resistenza di isolamento
Insulation resistance
Résistance d'isolement
Isolationswiderstand

> 10² MΩ

Rigidità dielettrica
Dielectric strength
Rigidité diélectrique
Durchschlagsfestigkeit

> 3000 Vac/60"

CE