



CONNETTORI SCART

SCART CONNECTORS


CONNECTEURS PERITEL

SCART STECKVERBINDERN

Tipo	SPTV	Connettore maschio	Per cavo Ø 4÷12 mm
Type		Male connector	For wire Ø 4÷12 mm
Type		Connecteur Mâle	Pour câble Ø 4÷12 mm
Typ		Stecker	Kabelausgang für Kabel Ø 4÷12 mm

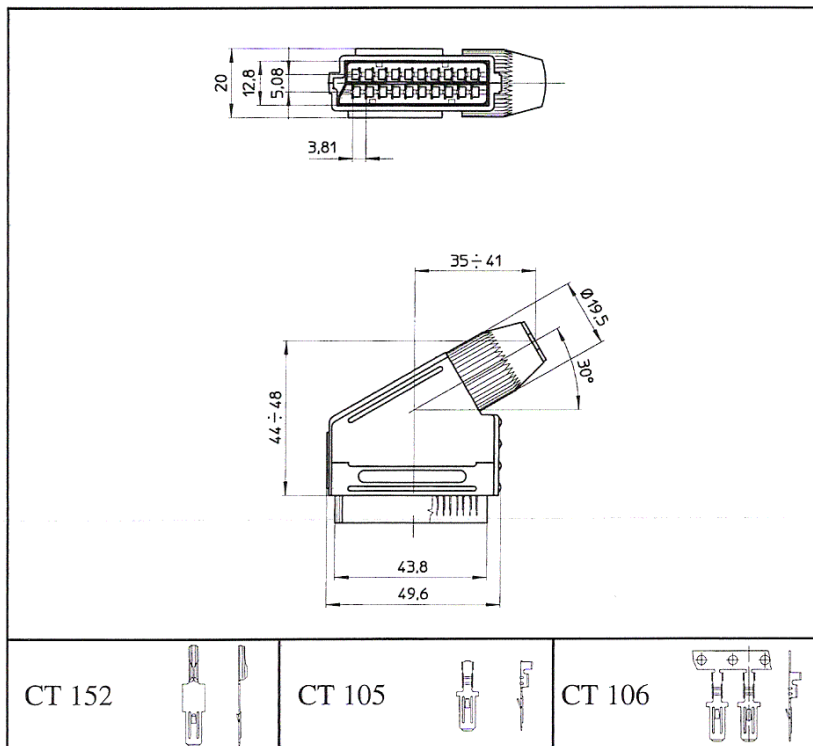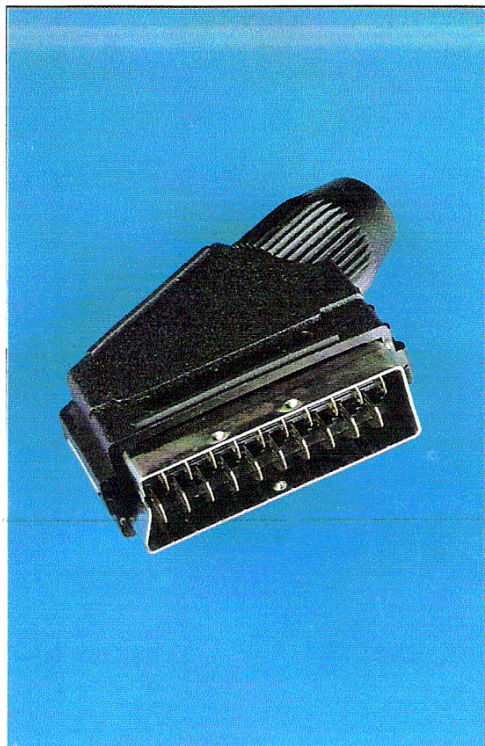


CT 152



CT 105



CT 106



Corpo isolante Insulating body Corps isolant Isolierkörper	Nero Black Noir Schwarz	Contatti Contacts Contacts Kontakte	Sforzo d'inserzione Insertion force Force d'insertion Einsteckkraft	Sforzo d'estrazione Withdrawal force Force d'extraction Ausziehkraft
PC UL 94 VO		CuZn 37 + Ni + Sn	F_i ≤ 50 N	20 N < F < 50 N
Corrente nom. per contatto Nominal current for contact Intensité nominale par contact Strombelastung per Kontakt	Corrente nom. totale Total nominal current Intensité nominal total Strombelastungsgesamt	Tensione Voltage Tension Spannung	Resistenza di contatto Contact resistance Résistance de contact Übergangswiderstand	Resistenza d'isolamento Insulation resistance Résistance d'isolement Isolationswiderstand
3 A - 20°C 1 A - 70°C	1,5 A - 20°C 0,1 A - 70°C	35 V - 50 Hz	≤ 25 mΩ	≥ 5.000 MΩ

Contatto da saldare Solder contact Contact à souder Lötankontakte	Contatto ad aggaffare Crimp contact Contact à sertir Crimp-Kontakt	Contatto ad aggaffare in bobina Crimp contact on reel Contact en bande à sertir Crimpkontakte an band
CT 152	CT 105	CT 106

SCHEMA PER ORDINAZIONE	SPTV	... / ...	E	Con 20 contatti sciolti da aggaffare With 20 loose crimp contacts Avec 20 contacts en vrac à sertir Mit 20 Crimp-Kontakte
ORDER SCHEME	WIRE	A	SC	Senza contatti Without contacts Sans contacts Ohne Kontakte
TABLEAU DE COMMANDE	Ø 6÷10 m ^{mm}	B	AG	20 CT 152 dorati 20 CT 152 gilded 20 CT 152 doré 20 CT 152 vergoldet
BESTELLSCHHEMA	Ø 4÷6 m ^{mm}	C	CG	20 contatti dorati a saldare inseriti 20 solder gilded contacts inserted 20 contacts doré a souder préinsérés 20 lotankontakte vergoldet montiert
	Ø 10÷12 m ^{mm}			