
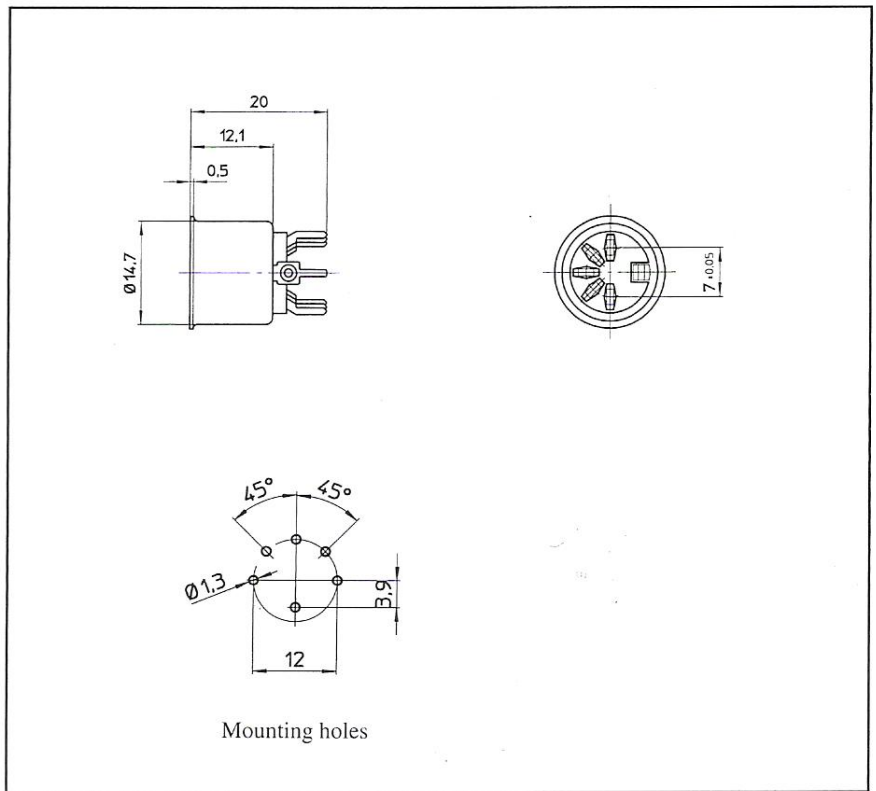


PRESE DIN		DIN SOCKETS	PRISES DIN	DIN BUCHSEN
Tipo	MG/PR...CS	Per C.S.	Schermate	
Type		For P.C.B.	Screened	
Type		Pour C.I.	Blindées	
Typ		Für leiterplatte	Abgeschirmte	

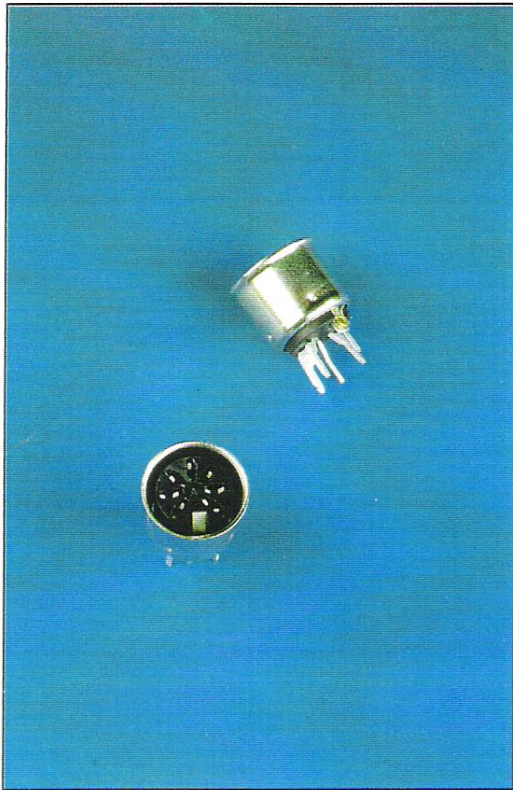

Corpo isolante <i>Insulating body</i> Corps isolant <i>Isolierkörper</i> PA 6	Nero <i>Black</i> Noir <i>Schwarz</i>	Contatti <i>Contacts</i> Contacts <i>Kontakte</i> CuZn 37 + Ni + Sn	Schermo <i>Screening</i> Blindage <i>Abschirmung</i> Fe P04 + Ni
Corrente per contatto <i>Current for contact</i> Intensité par contact <i>Belastung für kontakt</i> 4 A	Tensione <i>Voltage</i> Tension <i>Spannung</i> 34 V (DC) 24 V (AC)	Temperatura di lavoro <i>Working temperature</i> Température d'utilisation <i>Temperaturbereich</i> min. -30°C max. +80°C	Resistenza di contatto <i>Contact resistance</i> Résistance de contact <i>Übergangswiderstand</i> ≤ 10 mΩ

SCHEMA PER ORDINAZIONE	MG/PR ... CS				
ORDER SCHEME					
TABEAU DE COMMANDE					
BESTELLSHEMA					
	3	5	5K	7	8
					
	DIN 41524	DIN 41524	DIN 45327	DIN 45329	DIN 45326