
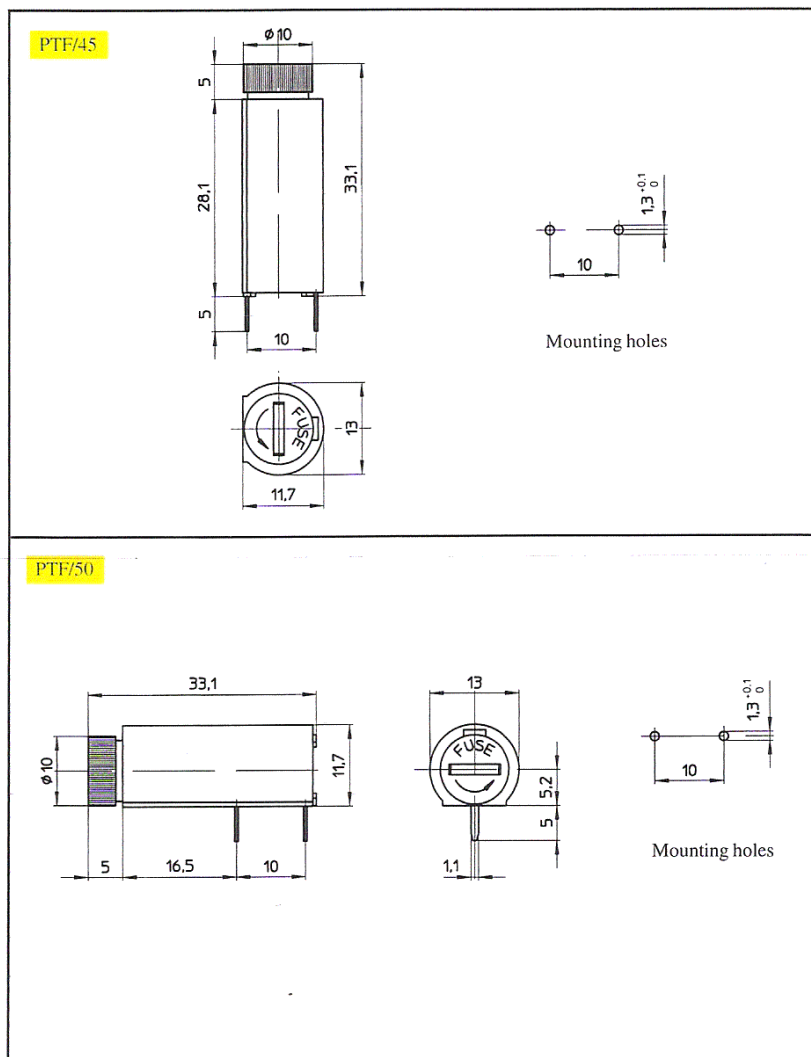


PORTAFUSIBILI		FUSE-HOLDERS		PORTE-FUSIBLES		SICHERUNGSSCHALTER	
Tipo	PTF/45 PTF/50	Per fusibili	5 x 20	Per C.S.	Für Leiterplatte	Coperchio a baionetta	Bayonet cover Couverture baionette Baionettdeckel
Type		For fuses		For P.C.B.		Bayonet cover	
Type		Pour fusibles		Pour C.I.		Couverture baionette	
Typ		Für sicherungen		Für leiterplatte		Baionettdeckel	

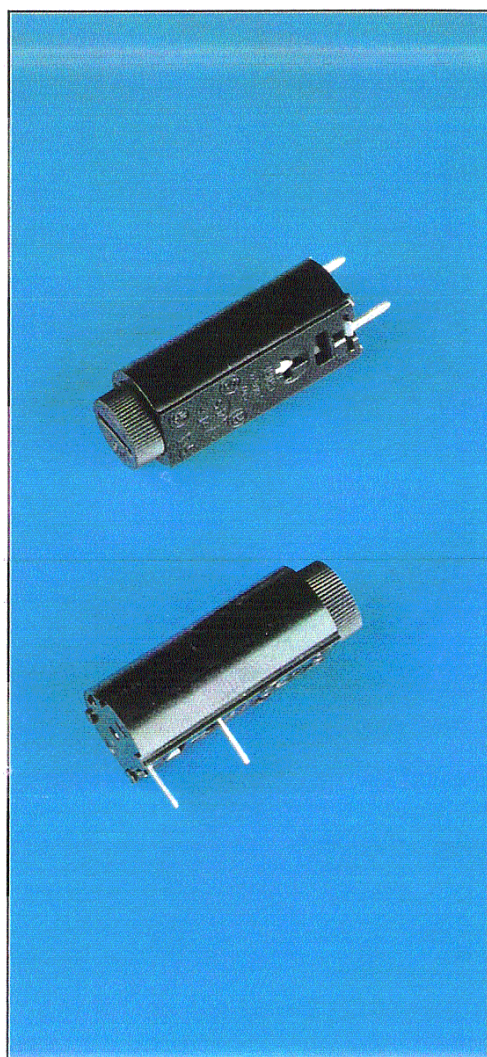

Corpo isolante	Coperchio	Nero	Contatti	Foro di montaggio
Insulating body	Cover	Black	Contacts	P.C.B. mounting hole
Corps isolant	Couverture	Noir	Contacts	Perçage C.I.
Isolierkörper	Deckel	Schwarz	Kontakte	Leiterplattenbohrung
PC UL 94 V0	PBT UL 94 V0		CuZn 37 + Ni + Sn	Ø 1,3 mm

Categoria
Class
Catégorie
Baureihe
PC2

Corrente nominale	Tensione	Potenza dissipabile	Resistenza di contatto	Resistenza di isolamento	Rigidità dielettrica	SEMKO FIMKO
Nominal current	Voltage	Operating power	Contact resistance	Insulation resistance	Dielectric strength	
Courant nominal	Tension	Puissance dissipable	Résistance de contact	Résistance d'isolement	Rigidité diélectrique	
Strombelastbarkeit	Betriebsspannung	Ausgangsleistung	Übergangswiderstand	Isolationswiderstand	Durchschlagsfestigkeit	
6,3 A	250 V	2,5 W	< 5 mΩ	> 10² MΩ	> 3000 Vac/60"	