

PORTAFUSIBILI

Tipo
Type
Type
Typ

PTF/55

FUSE-HOLDERS

Per fusibili
For fuses
Pour fusibles
Für Sicherungen


5 x 20

PORTE-FUSIBLES




Da pannello
For panel
Pour panneau
Für Tafel

SICHERUNGSSCHALTER

Coperchio a baionetta
Bayonet cover
Couverture baionette
Bajonettdeckel

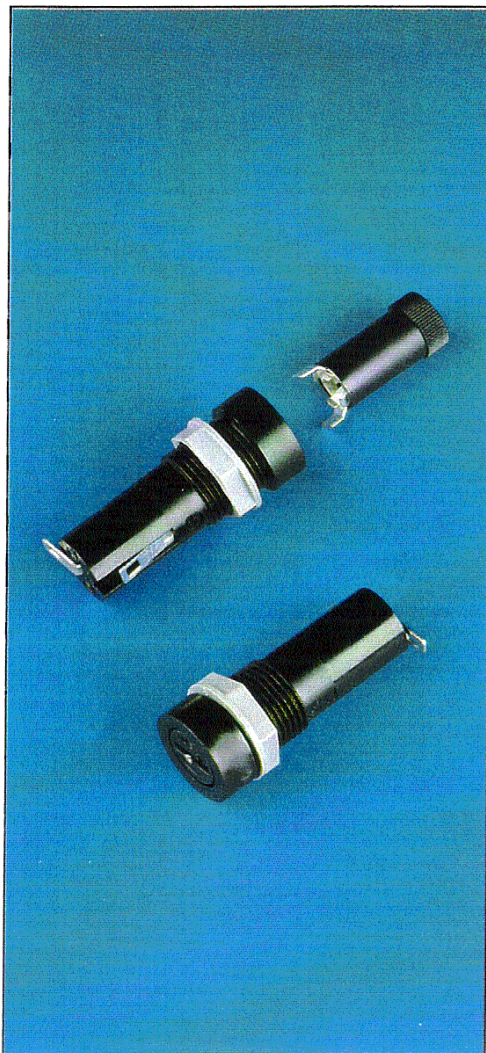

PTF/55



Mounting holes

Corpo isolante
Insulating body
Corps isolant
Isolierkörper

PC UL 94 V0

Coperchio
Cover
Couverture
Deckel

PBT UL 94 V0

Nero
Black
Noir
Schwarz

Contatti
Contacts
Contacts
Kontakte

CuZn 37 + Ni + Sn

Categoria
Class
Catégorie
Baureihe

PC2

Corrente
nominale
Nominal
current
Courant
nominal

6,3 A

Tensione
Voltage
Tension

250 V

Potenza dissipabile
Operating power
Puissance dissipable

2,5 W

Resistenza di
contatto
Contact resistance
Résistance de contact

< 5 mΩ

Resistenza
di isolamento
Insulation
resistance
Résistance
d'isolement

> 10² MΩ

Rigidità
dielettrica
Dielectric
strength
Rigidité
diélectrique

> 3000 Vac/60"

SEMKO

