

PORTAFUSIBILI
FUSE-HOLDERS
PORTE-FUSIBLES
SICHERUNGSSCHALTER


Tipo
Type
Type
Typ

PTF/80
PTF/80A


Per fusibili
For fuses
Pour fusibles
Für Sicherungen

5 x 20
6,3 x 32


Volante
In-line
En ligne
Drantanschluß

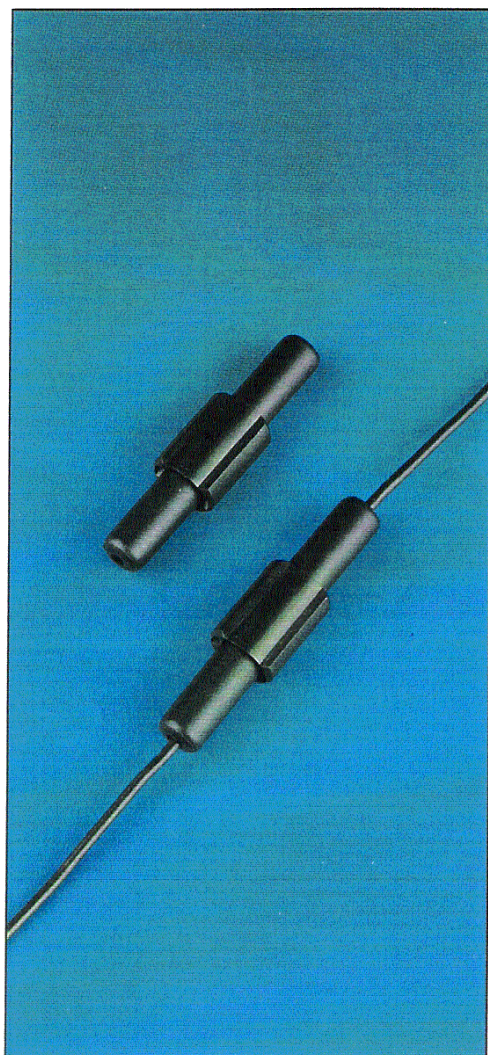

PTF/80

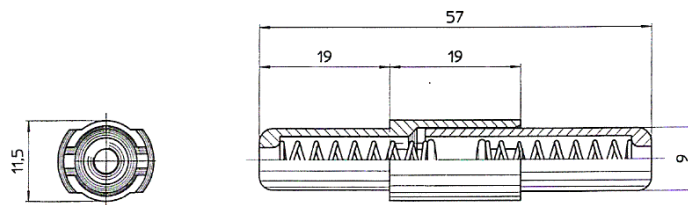

PTF/80A

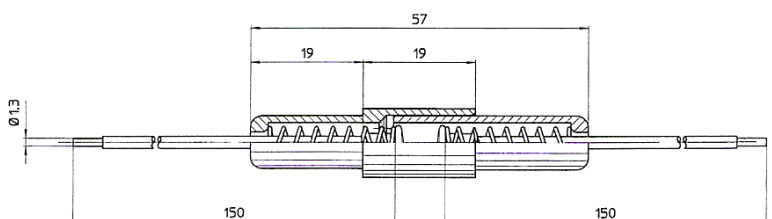

Corpo isolante
Insulating body
Corps isolant
Isolierkörper
PA 6

Nero
Black
Noir
Schwarz

Contatti
Contacts
Contacts
Kontakte
CuZn 37 + Ni

Cavo
Cable
Câble
Kabel
L = 150 mm - 0,75 mm²

Categoria
Class
Catégorie
Baureihe
PC1

Corrente nominale
Nominal current
Courant nominal
Strombelastbarkeit
6,3 A

Tensione
Voltage
Tension
Betriebsspannung
250 V

Potenza dissipabile
Operating power
Puissance dissipable
Ausgangsleistung
1,6 W

Resistenza di contatto
Contact resistance
Résistance de contact
Übergangswiderstand
< 5 mΩ

Resistenza di isolamento
Insulation resistance
Résistance d'isolement
Isolationswiderstand
> 10² MΩ

Rigidità dielettrica
Dielectric strength
Rigidité diélectrique
Durchschlagsfestigkeit
> 3000 Vac/60"

